


# DPT300: three phase

multi-function transducers

## compact, configurable multiple measurand transducers

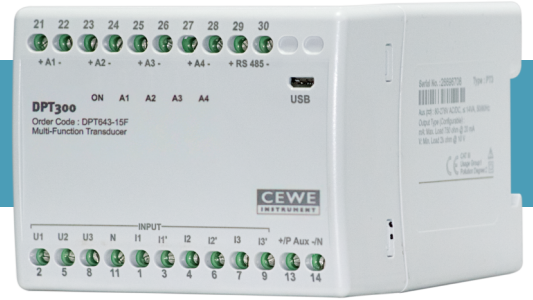

Accurate  
class 0.2 or 0.5 & 1



USB  
programming



Response time  
~100-250 ms



Modbus RTU

DPT300 is a range of compact, configurable multiple measurand transducers designed to meet the demanding needs of supply utilities and industrial applications. It offers accurate true-RMS measurements for high efficiency and quick response time. It is equipped with up to four load-independent, galvanically-isolated analogue outputs that can be configured for desired measurands, input range and different curves. DPT3 transducers comply with IEC 60688.

- Best in class response time
- Long range, site-configurable inputs, outputs and measurands
- Load-independent accuracy on all outputs
- 4-in-1 programmable transducers
- Diagnostic LEDs
- Compact footprint

Measurement functions (Measurands)	Output range	No. of outputs	Accuracy class
Voltage, current, frequency, active power, reactive power, power factor	-20 to (+20) mA, 4-20 mA, 0-20 mA, 0-1 mA**, -10 to (+10) mA, -5 to (+5) mA*, -2 to (+2) mA*, -5 to (+5) V, -10 to (+10) V	2 or 4	0.2, 0.5, 1.0

\*available in accuracy class 0.5 and 1.0

\*\*available in accuracy class 1.0


Power factor accuracy  $\pm 0.2$  degree at nominal input range

# DPT300: three phase


## multi-function transducers

### Output curves


**Curve A**  
Linear

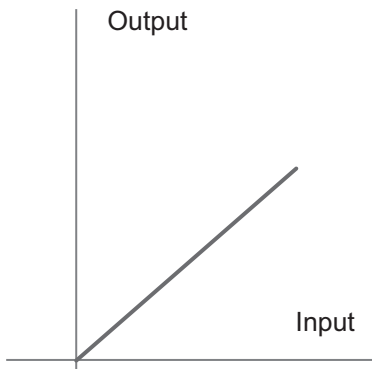


**Curve B**  
Linear with live zero

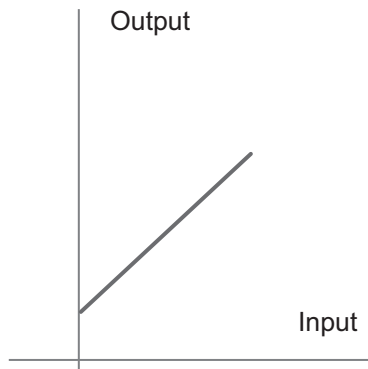


**Curve F**  
Compressed upper region

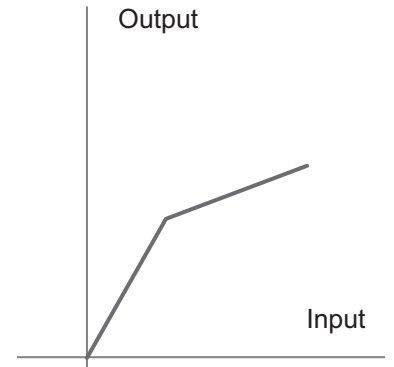


**Curve F**  
Compressed lower region

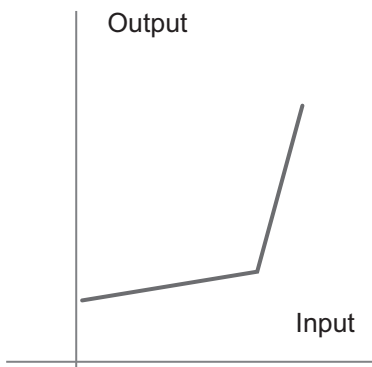


**Curve C**  
Bipolar

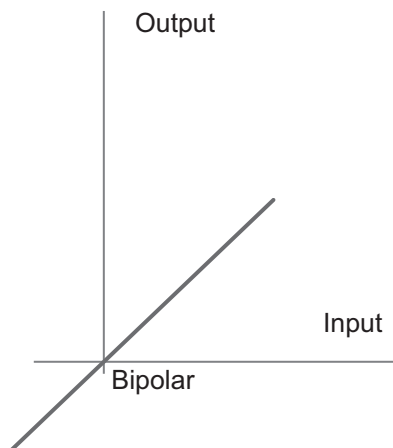


**Curve D**  
bipolar with live zero

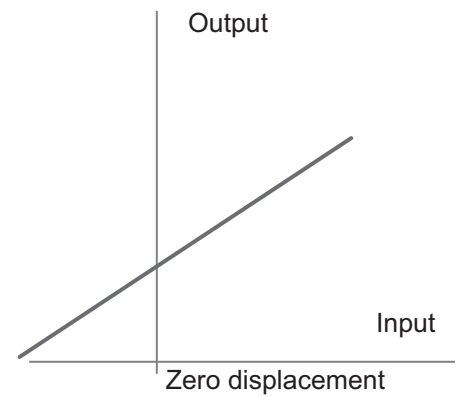


### Mechanical dimensions

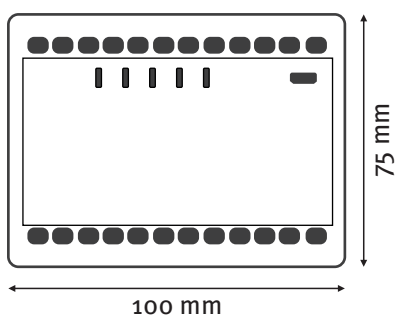

Front view

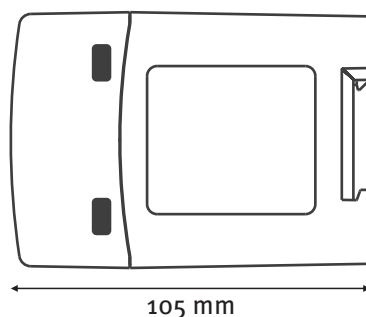

Side view

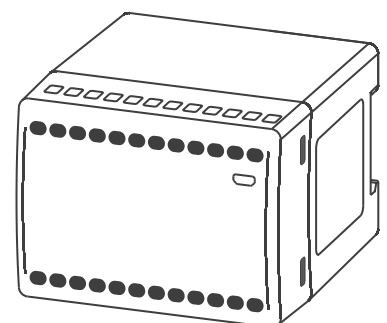

Isometric view

# DPT300: three phase

## Technical specifications

### Site-configurable measurement functions (measurands)

#### AC voltage

Nominal input ( $U_n$ )	3 x 100 to 415 V L-L (3-phase 3-wire system) 3 x 57.5 to 240V L-N (3-phase 4-wire system)
Measuring range	0 to 130% $U_n$ (500 V max.)
Measurement frequency	50/60 Hz ( $\pm 5\%$ )
Burden	$\leq 0.2$ VA
Maximum overload voltage	1.3 x $U_n$ continuously (500 V max.) 2 x $U_n$ for 1 s, with up to 10 repetitions at 10 s intervals

#### AC current

Nominal input ( $I_n$ )	1/5 A
Maximum input current	0 to 150% $I_n$
Scale factor	0.6 to 1.5
Burden	$\leq 0.2$ VA per phase
Maximum overload current	2 x $I_n$ continuously 20 x $I_n$ for 1 s, with up to 10 repetitions at 100 s intervals

#### Active power/reactive power

Nominal input voltage ( $U_n$ )	3 x 100 to 415 V L-L (3 phase 3 wire system) 3 x 57.5 to 240V L-N (3 phase 4 wire system)
Input voltage range	0-130% $U_n$ (up to 500 V)
Nominal input current ( $I_n$ )	1/5 A
Input current range	0 to 150% $I_n$
Measurement frequency	50/60 Hz ( $\pm 5\%$ )
Scale factor	0.5 to 1.5 (active power, at unity power factor) 0.3 to 1 (reactive power, at reactive power factor $> 0.8$ or unity)

#### Active power factor

Nominal input voltage ( $U_n$ )	3 x 100 to 415 V L-L (3 phase 3 wire system) 3 x 57.5 to 240V L-N (3 phase 4 wire system)
Input voltage range	0-130 % $U_n$ (up to 500 V)
Nominal input current ( $I_n$ )	1/5 A
Input current range	0 to 150 % $I_n$
Measurement frequency	50/60 Hz ( $\pm 5\%$ )
Measurement range	-1...0...1
Resolution	$\pm 0.2$ degree (at nominal range)

#### Auxiliary Supply

##### High auxiliary

Nominal voltage range	80-276 V AC/DC ( $\pm 10\%$ )
Frequency	50/60 Hz
Maximum burden	$\leq 11$ VA, 6 W with two outputs at 750 $\Omega$ each $\leq 12$ VA, 7 W with four outputs at 750 $\Omega$ each

##### Low auxiliary

Nominal voltage range	24-80 V DC ( $\pm 10\%$ )
Maximum burden	$\leq 6$ W with two outputs at 750 $\Omega$ each $\leq 8$ W with four outputs at 750 $\Omega$ each

#### Analogue outputs

Type	Current & Voltage (bipolar)
Maximum Load resistance	$\leq 750$ $\Omega$ for 20 mA, $\geq 2$ k $\Omega$ for 10 V (for each output)
Response time	5 cycles measurement ( $\leq 100$ -250 ms)
Ripple	$< 0.4\%$ peak to peak

# DPT300: three phase

## Technical specifications

### Temperature range

Operating temperature	-5°C to +55°C
Storage temperature	-25°C to +70°C
Usage group	1

### Mechanical

Dimension (W x H x D)	100 x 75 x 105 mm
Weight	0.7 kg (approx.)
Material	Fire-retardant polycarbonate (PC-FR), UL94 V-0
Mounting	DIN (EN 50022)
Connector type	Screw terminals
Conductor size for terminals	≤4 mm <sup>2</sup>

### Environmental

Protection class	II (double insulation) EN 61010-1
Pollution degree	2
Installation category	CATIII
Protection degree	Protection housing IP 40, terminals IP 20

### Standards compliance

Standards	IEC 60688, IEC 61010-1, IEC 61010-2-30, IEC 61326-1, DIN 50022
-----------	---

### Communication ports

Micro USB B-Type	For configuration Can be configured without auxiliary power
RS-485	Modbus RTU enabled (Suitable for integration with SCADA/PLC)
Baud rate	1200-38400 baud

### Configuration software

Configview  
For on-site configuration of measurement inputs, measurands output curve and online parameter reading. It can be freely downloaded from [www.securemeters.com](http://www.securemeters.com)

## Ordering key

### DPT XX<sub>3</sub>-1YF

#### Example

DPT 643-12F  
where high auxiliary (6),  
output nos. (4), accuracy class(2)

